


AN·TRAX IT



20
I2

BDO Trim

Scaldasalviette della linea
Trim con sviluppo
orizzontale

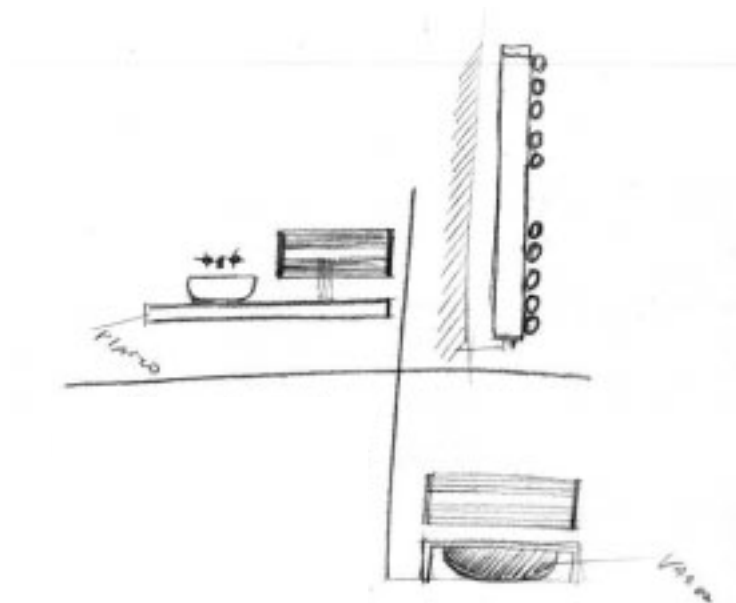

*Towel warmer for the Trim
line set on the horizontal*

*Radiateur sèche-serviettes de
la ligne Trim avec
développement horizontal*

*Handtuchwärmer der Linie
Trim mit waagrechter
Montagerichtung.*

*Calentador de toallas de la
línea Trim con desarrollo
horizontal*



Bath / DBO TRIM
36.8 x 140 cm
WATT ΔT 50° [619]
COLOR : GROPE

INFORMAZIONI TECNICHE / TECHNICAL DETAILS/ DONNÉES
TECHNIQUES / TECHNISCHE DATEN / INFORMACIONES TÉCNICAS
PAGE 311

Informazioni tecniche

Technical details


Données techniques

Tecnische Daten

Informaciones técnicas

Afly	300-301
BD13d	307
BD13s	305
BD13s crom	306
BD25d	310
BD25s	308
BD25s crom	309
BD Bend	304
BDO 13	312
BDO25	313
BDO Trim	311
Merlino	298
Trim Bath	299
Virgola	303

BD 25d



STBOS

min. 10
max. 70

B* ≤ 60

min. 13
max. 20

STBOP

min. 6

B* ≤ 40

STBOPV


min. 13

B* ≤ 40


I* = A* · 8 cm

min. 10
max. 20

[A] attacco standard
stantard connection
raccord standard
standard Anschluss
conexión estándar



[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



P* 320

A* cm	in	B* cm	in	I* cm	in	art*	BTU Δt 50°	watt Δt 50°
80.0	31.5	40.0	15.7	36.0	14.2	BD25000D080040	1 918	563
80.0	31.5	50.0	19.7	46.0	18.1	BD25000D080050	2 391	701
80.0	31.5	60.0	23.6	56.0	22.0	BD25000D080060	2 864	840
80.0	31.5	70.0	27.6	66.0	26.0	BD25000D080070	3 336	978
80.0	31.5	80.0	31.5	76.0	29.9	BD25000D080080	3 808	1 117
80.0	31.5	90.0	35.4	86.0	33.9	BD25000D080090	4 276	1 254
80.0	31.5	100.0	39.4	96.0	37.8	BD25000D080100	4 744	1 391
116.0	45.7	40.0	15.7	36.0	14.2	BD25000D116040	2 659	780
116.0	45.7	50.0	19.7	46.0	14.2	BD25000D116050	3 315	972
116.0	45.7	60.0	23.6	56.0	14.2	BD25000D116060	3 975	1 166
116.0	45.7	70.0	27.6	66.0	14.2	BD25000D116070	4 634	1 359
116.0	45.7	80.0	31.5	76.0	14.2	BD25000D116080	5 294	1 552
116.0	45.7	90.0	35.4	86.0	14.2	BD25000D116090	5 953	1 746
116.0	45.7	100.0	39.4	96.0	14.2	BD25000D116100	6 609	1 938
152.0	59.8	40.0	15.7	36.0	14.2	BD25000D152040	3 408	999
152.0	59.8	50.0	19.7	46.0	14.2	BD25000D152050	4 250	1 246
152.0	59.8	60.0	23.6	56.0	14.2	BD25000D152060	5 096	1 495
152.0	59.8	70.0	27.6	66.0	14.2	BD25000D152070	5 946	1 744
152.0	59.8	80.0	31.5	76.0	14.2	BD25000D152080	6 788	1 991
152.0	59.8	90.0	35.4	86.0	14.2	BD25000D152090	7 634	2 239
152.0	59.8	100.0	39.4	96.0	14.2	BD25000D152100	8 480	2 487
188.0	74.0	40.0	15.7	36.0	14.2	BD25000D188040	4 032	1 182
188.0	74.0	50.0	19.7	46.0	14.2	BD25000D188050	5 035	1 477
188.0	74.0	60.0	23.6	56.0	14.2	BD25000D188060	6 039	1 771
188.0	74.0	70.0	27.6	66.0	14.2	BD25000D188070	7 042	2 065
188.0	74.0	80.0	31.5	76.0	14.2	BD25000D188080	8 045	2 359
188.0	74.0	90.0	35.4	86.0	14.2	BD25000D188090	9 052	2 655
188.0	74.0	100.0	39.4	96.0	14.2	BD25000D188100	10 055	2 949

A* = altezza / height / hauteur / Höhe / alto
I* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

art* = articolo / model / modèle / Artikel / artículo
P* = pagina / page / page / Seite / página



Ulteriori dettagli
Further details
Ulérieures détails
Weitere Einzelheiten
Otros detalles

P* 318

Colori/ colours / couleurs / Farbe / colores


[BIAN] B standard
T + 10%
S + 20%
[RAL] S + 20%
RAL non inclusi in tabella
special Ral colours
couleurs Ral spéciales
RAL Farbe nicht in der Tabelle inbegriffen
colores RAL especiales

Kcal = Watt x 0,860
BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,247
Watt Δt 40° = Watt Δt 50° x 0,764
Watt Δt 30° = Watt Δt 50° x 0,539
Watt Δt 20° = Watt Δt 50° x 0,329

p max = 10.0 bar


BDO Trim



[A] attacco standard
standart connection
raccord standard
standard Anschluss
conexión estándar



[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



P* 320

A* cm	in	B* cm	in	I* cm	in	art*	BTU Δt 50°	watt Δt 50°
36.8	14.5	120.0	47.2	116.0	45.7	HB15000S036120	1 823	534
36.8	14.5	140.0	55.1	136.0	53.5	HB15000S036140	2 113	619
36.8	14.5	160.0	63.0	156.0	61.4	HB15000S036160	2 430	712
58.4	23.0	120.0	47.2	116.0	45.7	HB15000S058120	2 734	801
58.4	23.0	140.0	55.1	136.0	53.5	HB15000S058140	3 171	929
58.4	23.0	160.0	63.0	156.0	61.4	HB15000S058160	3 645	1 068

A* = altezza / height / hauteur / Höhe / alto
I* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

B* = larghezza / width / longueur / Breite / ancho

art* = articolo / model / modèle / Artikel / artículo
P* = pagina / page / page / Seite / página

Kcal = Watt x 0,860
BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,255
Watt Δt 40° = Watt Δt 50° x 0,758
Watt Δt 30° = Watt Δt 50° x 0,530
Watt Δt 20° = Watt Δt 50° x 0,320

p max = 10.0 bar

Colori/ colours / couleurs / Farbe / colores

[BIAN] B standard
T + 10%
S + 20%
[RAL] S + 20%
RAL non inclusi in tabella
special Ral colours
couleurs Ral spéciales
RAL Farbe nicht in der Tabelle inbegriffen
colores RAL especiales

Ulteriori dettagli
Further details
Ultérieures détails
Weitere Einzelheiten
Otros detalles



P* 318

ANTRAX IT SRL
VIA BOSCALTO 40
31023 RESANA TV - ITALY
TEL. +39 0423 7174
FAX +39 0423 717474
WWW.ANTRAX.IT
ANTRAX@ANTRAX.IT

CONCEPT: Alberico Crosetta
GRAPHIC: Alberico Crosetta
PHOTO: Quasarfoto
PRINT: Ditre Artigrafiche [04/2012]

THANKS TO:

Catellani & Smith
Hoesch
B-mood
Antrax Hellas LTD
Luca Tessarin
Walter Mentil
Tillen Zbona
Valentina Meli
Borsa di Milano
Hotel les Fleurs

